

ENCHUFE INTELIGENTE WIFI DAKAI/WIFI SMART PLUG DAKAI



MODELO/MODEL. SH1800



Control Remoto
Remote Control



Función de Temporizador
Timing Function



Sincronización
Através de App
App Sync



Programación Inteligente
Intelligent Schedule

Por favor lea cuidadosamente antes de usar su equipo
y guárdelo para uso de futuras consultas. (Página 2)
Please read carefully before using your equipment
and save it for future use. (Page 28)

MANUAL DE USUARIO/USER MANUAL

Descripción General

Función principal:

1. Es compatible con Amazon Alexa / Echo Dot, Google Home y IFTTT.
2. Administra tus dispositivos a través de tu teléfono móvil o el control de voz.
3. Programación Inteligente - Socket Inteligente, puede crear múltiples calendarios para encender / apagar sus aparatos electrónicos.
4. Monitoreo de Energía - Estadísticas de Consumo de Energía (Opcional).

Indicador y Descripción de Funciones

Presione el botón de encendido brevemente, si el indicador azul se ilumina significa que está encendido, si el indicador azul no se ilumina significa que se encuentra apagado.

Mantenga presionado el botón de encendido durante unos 5 segundos, si el indicador azul parpadea significa que el producto comenzará a entrar en el modo de sincronización de red.

Si el indicador azul parpadea lentamente significa que la conexión de red es anormal, por favor, compruebe la configuración del router o la red.

Tamaño y Carcasa del Producto



Especificaciones

General	Color	Blanco
	Estándares de WiFi	IEEE 802.11 b / n / g 2.4G Hz
	LED (Azul)	Estado Encendido
	Funciones Principales	Control remoto a través de la aplicación; control por voz a través de Alexa y Google Home
		Programación de encendido
		Protección contra sobrecalentamiento
Soporte del Sistema	iOS y Android	

Físico	Dimensiones	53.88 mm * 49.5 mm
	Peso	54.6 g
	Entrada de Energía	Corriente Alterna 100V~125V 50Hz/60Hz 10A
	Capacidad de Potencia	1 200W
	Salida de Energía	Corriente Alterna 100V~125V 50Hz/60Hz 10A
	Temperatura	En funcionamiento: de 32 °C a 104 °C Almacenamiento: -4 °C a 149 °C
	Humedad	En funcionamiento: 10% a 90% sin condensación Almacena- miento: 5% a 95% sin conden- sación
Garantía	1 año, uso en interiores	

Cómo Funciona

Active la Inteligencia de su Socket


Use su teléfono para escanear el código QR a continuación o busque “Smart life (vida inteligente)” en la App Store para descargar e instalar la App.




Paso 1: Registre e inicie sesión en la APP "Smart life (vida inteligente)"


Si usted no tiene cuenta en el App de "Smart life (vida inteligente)", para registrar una cuenta inicie sesión con la página de verificación de número de teléfono móvil + código de verificación. Ésta página describe el proceso de registro.

- 1.** Pulse "Registrar (Register)" en la esquina superior derecha (Imagen 1).
- 2.** El sistema determina automáticamente su país / área. También puede seleccionar el código de país por sí mismo. Introduzca el número de teléfono móvil / E-mail y pulse "Siguiendo (Next)" (Imagen 2).
- 3.** Si introduce su número de celular, introduzca el código de verificación en el mensaje (Imagen 3), y coloque la contraseña, pulse "Confirmar (Confirm)" para finalizar el registro.
- 4.** Si se introduce la dirección de correo, introduzca la contraseña (Imagen 4), pulse "Confirmar (Confirm)" para finalizar el registro.

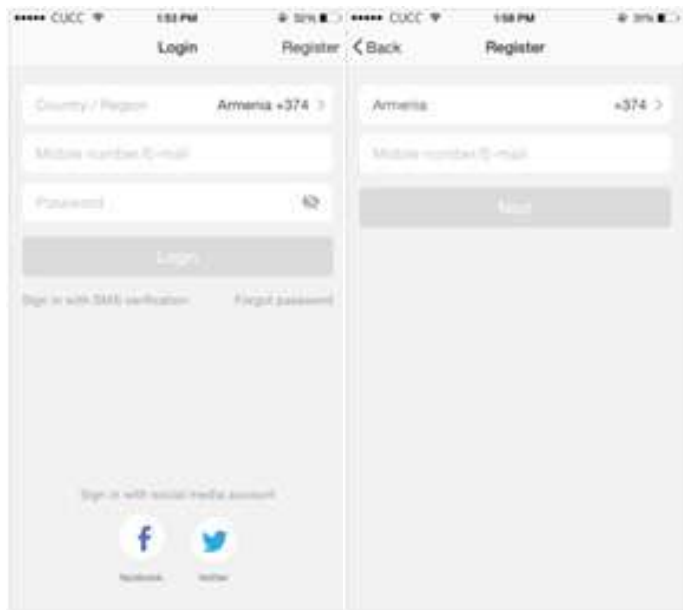

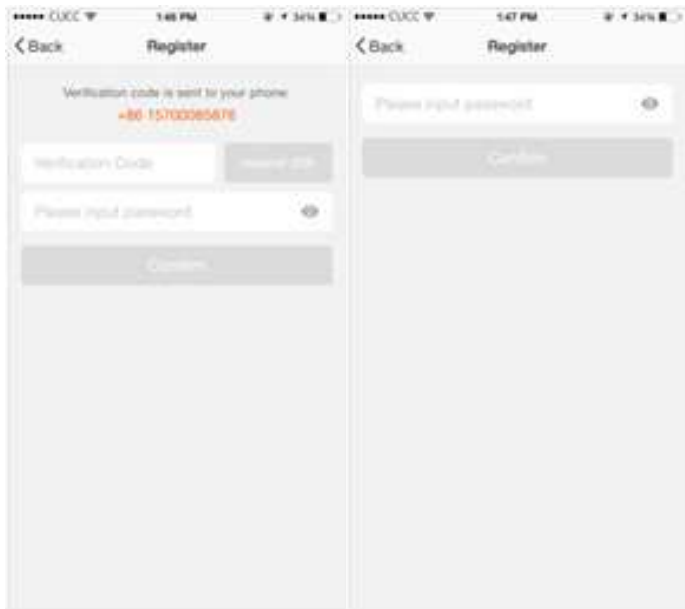

Asegúrese de que su teléfono esté conectado al WiFi de su casa. Haga clic en "+" en la esquina superior derecha de la página principal y seleccione "Toma de corriente eléctrica (Electrical outlet)" en el tipo de dispositivo.

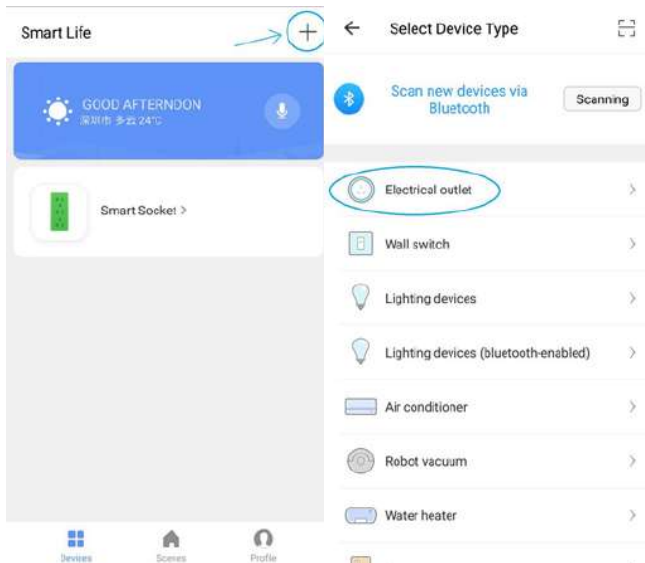

Paso 2: Conecte a la fuente de alimentación, mantenga pulsado el botón de encendido más de 5 segundos hasta que la luz indicadora entre en el modo de flasheo rápido.


Paso 3: Introduzca la contraseña del Wi-Fi para su teléfono y haga clic en "Confirmar (Confirm)" para entrar en la página de búsqueda de dispositivo.



Power on the device and confirm that indicator light rapidly blinks

[How to make indicator rapidly blink](#)

Confirm indicator rapidly blink

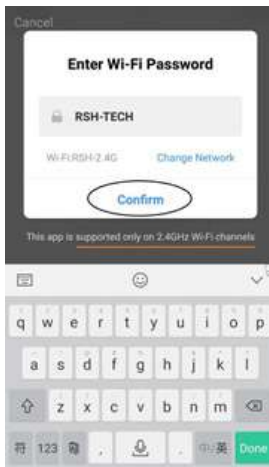

Cancel

Connecting now




Make sure your phone and device
are as close to your router as possible.

- Searching for device
- Registering device to the cloud
- Activating your device


Paso 4: Entre a la página del dispositivo, a continuación, complete la configuración.



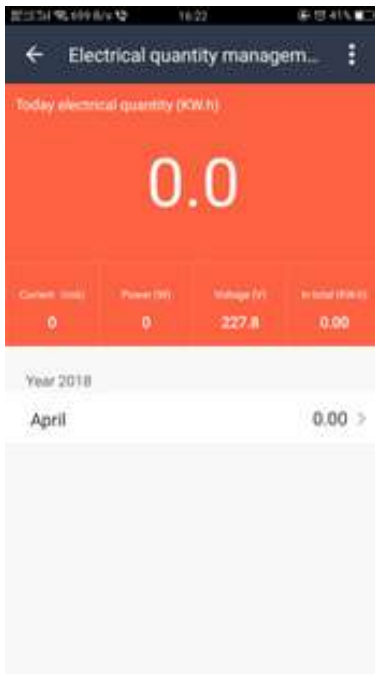


Cómo Funciona con Amazon, Alexa y Echo

Paso 1: Abra la aplicación "Alexa Amazon", y luego busque el botón "Habilidades (Skills)" en el menú. Presiónelo.

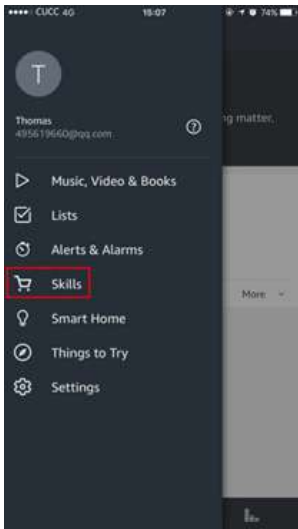


Paso 2: Buscar "Smart life (vida inteligente)" y elegir el primero, luego actívalo.




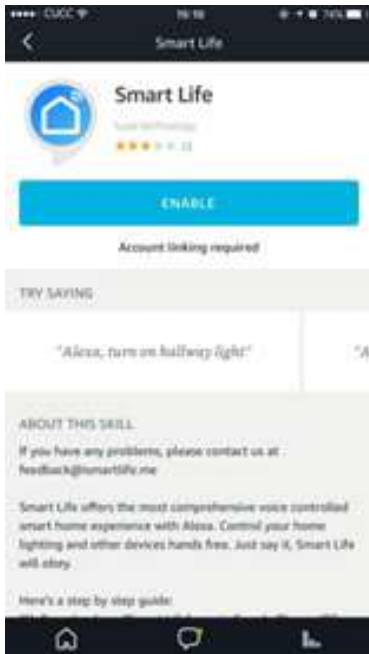


Paso 3: Seleccione el código del país y entre a su cuenta de la Aplicación "Smart life" e ingrese la Contraseña, luego pulse el botón "Enlazar Ahora (Link Now)". Cuando tenga éxito en Iniciar Sesión presione el botón "Hecho (Done)"

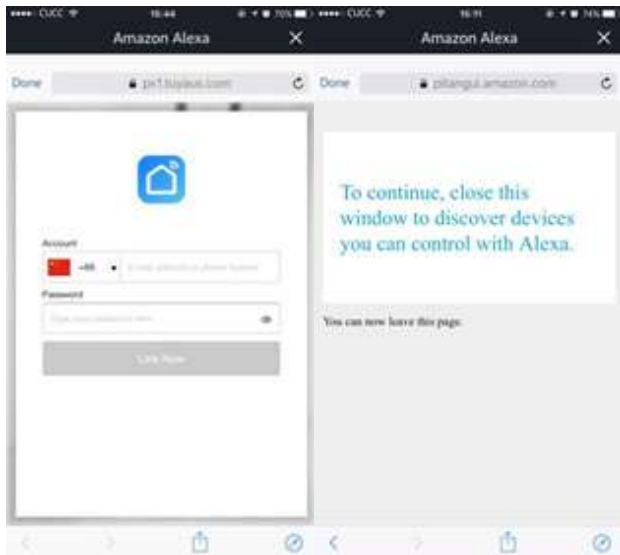

Paso 4: Volver al menú, y pulse el botón de “Casa inteligente (Smart home)”, a continuación, elija los “Dispositivos (Devices)”, a continuación, pulse el botón “Descubrir (Devices)”

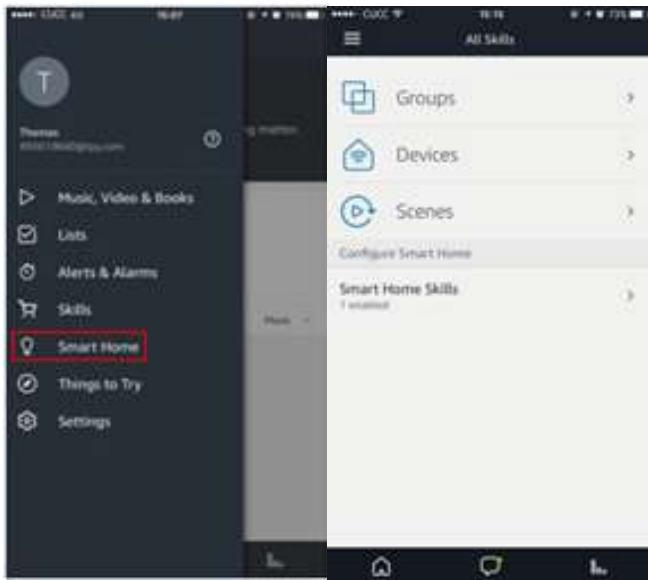


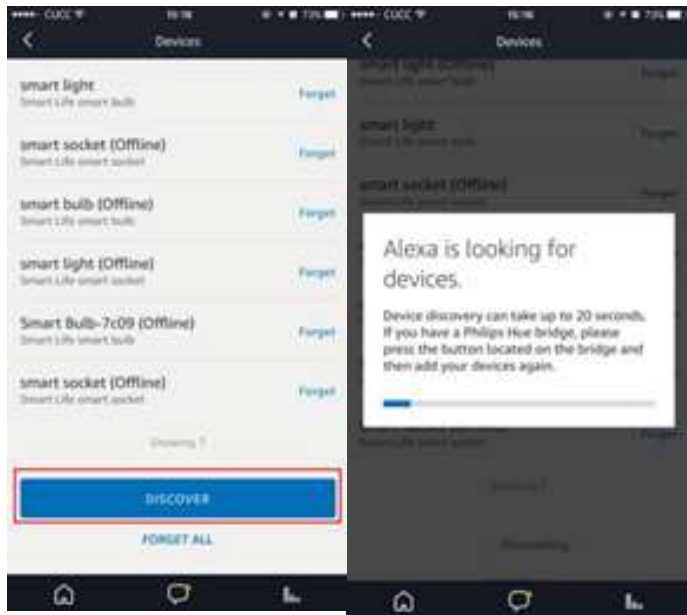


Paso 5: Ahora puede usar Alexa para controlar sus dispositivos inteligentes, disfrute.

Cómo Trabaja con Google Home / IFTTT

Paso 1: Haga clic en "Integración (Integration)" en el perfil de la página de la aplicación de Smart Life.

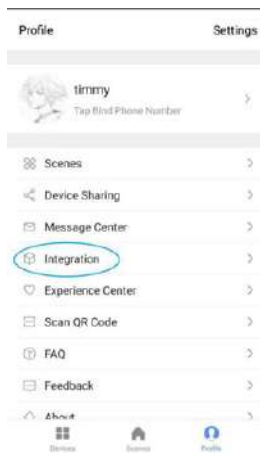


Paso 2: Se pueden ver las tres aplicaciones. Y haga clic en “Usar Ahora (Use Now)”, verá cómo usarlos para controlar su smart socket.

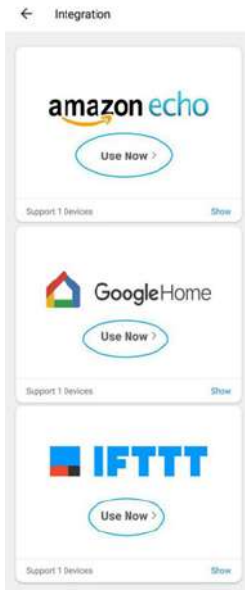

Paso 3: Siga los pasos en estas aplicaciones. Justo como en la de Alexa Amazon/Echo.

← Use IFTTT



How to control your device via IFTTT


Step 1: Add device
Make sure there's at least one device that support IFTTT in device list.

Step 2: Modify device name
Change device name to a easily recognized one. Such as: living room light, bedroom light.

Step 3: Download IFTTT app
Download IFTTT app from App Store or Google Play and sign in with your IFTTT account.

Step 4: Build your Applet
You can directly search "SmartLife" Service and enable the preset Applet we provide. Or you can create your own Applet, and add trigger (this) or action (that) from "SmartLife" service. Then your device will have the ability to interact with the best services from all over the world.

← Use Google Home



How to control your device via Google Home

Step 1: Add device
Make sure there's at least one device that support Google Home in device list.

Step 2: Modify device name
Change device name to a easily recognized one. Such as: living room light, bedroom light.

Step 3: Set up Google Home
Make sure phone system language is English. Then use Home App to set up Google Home.

Step 4: Add Home Control Action
Add device in Home Control of the Home app. Select "SmartLife", then fill in the correct login info of your app account to finish the account linking. Your device should be listed in Home Control device list now.

Step 5: Control device
Now you can control devices through Google Home.
The following voice comments are supported:
Ok Google, turn on the plug.
Ok Google, set bedroom light to 35%.
Ok Google, brighten bedroom light.
Ok Google, kitchen light to green.

PÓLIZA DE GARANTÍA

Qian S.A. de C.V., garantizará este producto en todos sus componentes y mano de obra durante el periodo de 12 meses, contando a partir de la fecha de adquisición contra cualquier defecto de fabricación y funcionamiento durante el uso normal y doméstico de este producto.

Qian S.A. de C.V. garantiza al comprador la ausencia de anomalías de fabricación y funcionamiento incluyendo piezas y componentes del producto o en lo referente a materiales.

1. Esta póliza ampara únicamente productos comercializados por **Qian S.A. de C.V.**, a través de sus distribuidores autorizados dentro de la República Mexicana y los Estados Unidos de América.
2. Para la validación de ésta se deberá presentar el producto defectuoso junto con la presente póliza de garantía completamente llenada y sellada por el distribuidor que realizó la venta o la factura, recibo, o comprobante de compra en el lugar donde se adquirió el producto, o en el Centro de Servicio Nacional.
3. **Qian S.A. de C.V.** podrá utilizar piezas nuevas, restauradas o usadas en buenas condiciones para reparar o reemplazar cualquier producto, sin costo adicional para el consumidor, siempre y cuando el periodo de garantía estipulado en la presente póliza no se haya terminado.
4. En caso de que el producto no tenga reparación, se generará el cambio por un producto similar o de características superiores.

5. El tiempo de reparación no será mayor de 30 días naturales a partir de la fecha de recepción del producto por parte de **Qian S.A. de C.V.** o en su Centro de Servicio Autorizado.

6. **Qian S.A. de C.V.** cubrirá los gastos de envío requeridos para la presentación del producto dentro de la red de centros de servicio autorizados.

EXCLUSIONES

Qian S.A. de C.V. no hará válida esta póliza de garantía en los siguientes casos:

- Cuando el producto se hubiese utilizado en condiciones distintas a las normales.
- Cuando el producto no se hubiese operado de acuerdo al instructivo de uso que lo acompaña.
- Cuando el producto hubiese sido alterado o reparado por personas no autorizadas por parte de **Qian S.A. de C.V.**

Para hacer válida la garantía, así como la adquisición de componentes, partes consumibles y accesorios pueden solicitar información en www.qian.mx o dirigirse a cualquier Centro de Servicio Autorizado **Qian S.A. de C.V.**

Centro de Servicio Autorizado para Garantía:

Qian S.A. de C. V.

Calz. José Guadalupe Gallo #8490-A

Col. Agua Blanca Industrial, Zapopan

Jalisco, México. C.P. 45235

Tel. +52.33.1078.3404

**Centro de Servicio Autorizado para
Componentes, Consumibles y Accesorios:**

Qian S.A. de C. V.

Calz. José Guadalupe Gallo #8490-A

Col. Agua Blanca Industrial, Zapopan

Jalisco, México. C.P. 45235

Tel. +52.33.1078.3404

Producto:	
Fecha de Compra:	Sello del Distribuidor
Modelo:	
Marca: Qian.mx	

Información Sobre Seguridad

Advertencias en materia de seguridad de Corriente Alterna (CA)



ADVERTENCIA: Coloque la smart socket en una toma de corriente alterna. Conecte el smart socket únicamente a tomas de corriente con conexión a tierra para evitar el riesgo de descarga eléctrica.



ADVERTENCIA: Desconecte el smart socket cuando quite la cubierta.



ADVERTENCIA: No ponga en marcha el smart socket sin la cubierta.



ADVERTENCIA: El usuario no debe realizar ningún tipo de reparación al smart socket. Para evitar daños, confíe su reparación o reemplazo sólo a una persona calificada.

CONSUMO	Entrada de Energía: Corriente Alterna 100V~125V 50Hz/60Hz 10A
	Salida de Energía: Corriente Alterna 100V~125V 50Hz/60Hz 10A

Overview

Main Function:

1. Work with Amazon Alexa/ Echo Dot& Google Home& IFTTT.
2. Manage your devices via your mobile phone or Voice Control.
3. Intelligent Schedule - Smart socket could create multiple schedules to turn on/off your electronic sets.
4. 4. Energy Monitoring - Statistical power consumption. (Optional function, confirm with the supplier before buy)

Function Key and Indicator Description

Short press the power button, blue indicator lights up means power on, blue indicator lights off means power off.

Long press the power button for about 5 seconds, blue indicator flashes means the product begin enter into the distribution network mode.

Blue indicator flashes slowly means the network connection is abnormal, please check the router or network configuration.

Product Hosing and Size



Specifications

General	Color	White
	WiFi Standards	IEEE 802.11 b / n / g 2.4G Hz
	LED (Blue)	Power/status
	Main Functions	Remote control via App; Voice control via Alexa & Google Home
		Power scheduling
		Overheat protection
System Support	IOS & Android	

Physical	Dimensions	53.88 mm * 49.5 mm
	Weight	54.6 g
	Power Input	Alternating Current 100V~125V 50Hz/60Hz 10A
	Power Capacity	1 200W
	Power Output	Alternating Current 100V~125V 50Hz/60Hz 10A
	Temperature	Operating: 32 °C to 104 °C Storage: -4 °C to 149 °C
	Humidity	In operation: 10% to 90% non-condensing Storage: 5% to 95% non-condensing
Warranty	1-year indoor use only	

How It works

Turn On Intelligence


Use your phone to scan the QR code below or search “smart life” in application market to download and install the App.




Step 1: Registration and login "smart life" APP.


If you don't have the account of "Smart life" APP, register an account or sign in with cellphone number + verification code. This page describes the Registration process.

- 1.** Tap "Register" in the upper right (pic 1)
- 2.** The system automatically determines your country / area. You can also select your country code by yourself. Enter the cellphone number/E-mail and tap "Next" (pic 2)
- 3.** If you enter the mobile cellphone number, enter the verification code in the message (pic 3) and enter the password tap "Confirm" to finish your registration.
- 4.** Si se introduce la dirección de correo, introduce la contraseña (Imagen 4), pulse "Confirmar" para finalizar el registro.

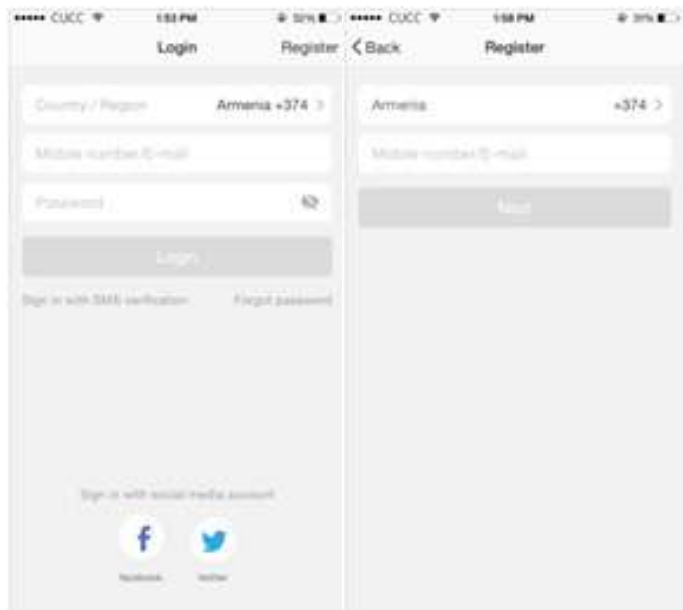

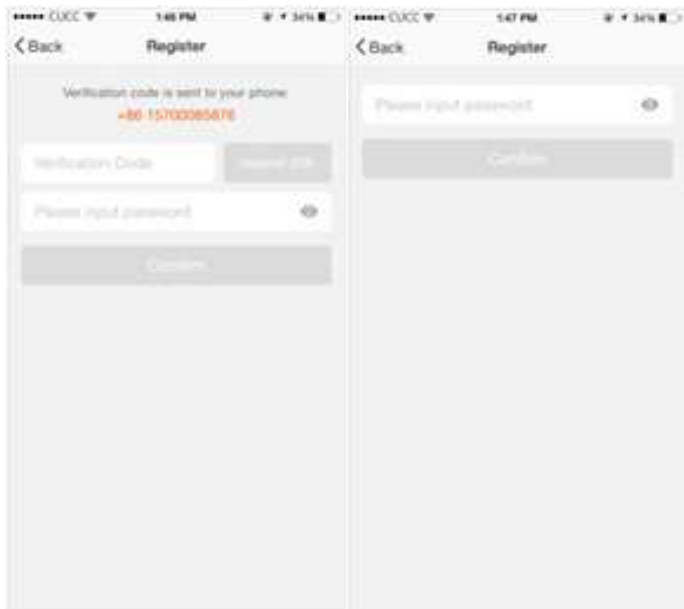

Make sure your phone is connected to WiFi in your home. Click "+" in the upper right corner of the homepage and select "Electrical outlet" from the device type.

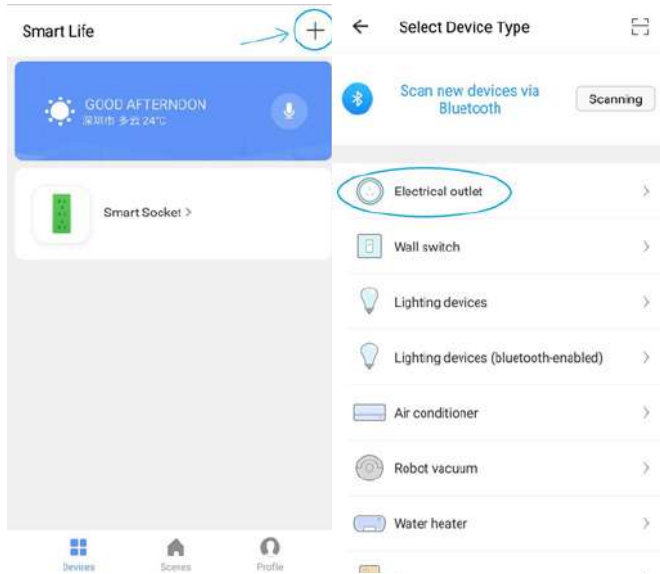

Step 2: Connect with the power supply, long press the power button more than 5 seconds until the indicator light enters into the fast flash mode. Select confirm indicator rapidly blinks.


Step 3: Enter your WiFi password for your phone and click "Confirm" to enter the page of the search device.



Power on the device and confirm that indicator light rapidly blinks

[How to make indicator rapidly blink](#)

Confirm indicator rapidly blink

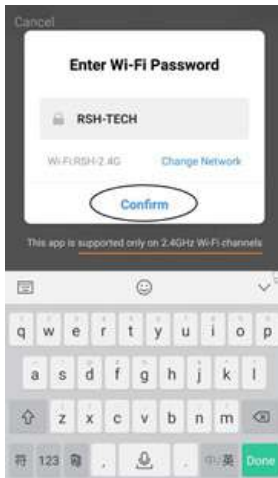

Cancel


Connecting now.



Make sure your phone and device
are as close to your router as possible.

- Searching for device
- Registering device to the cloud
- Activating your device


Step 4: Enter the device page, then complete the configuration.

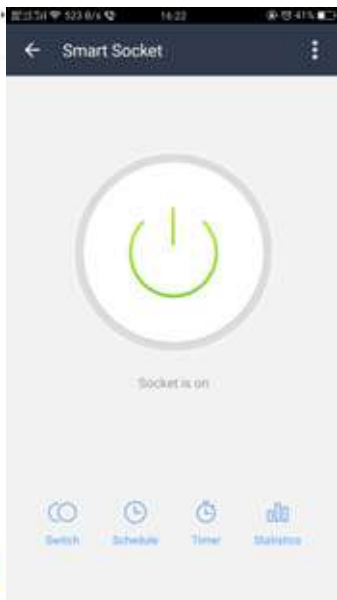




How It Work With Amazon Alexa & Echo

Step 1: Open the " Amazon Alexa"APP,then find the "Skills "button on the menu. Press it

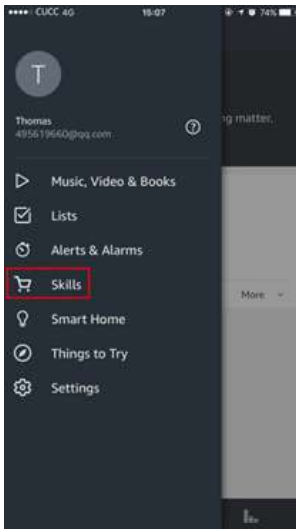


Step 2: Search the " Smart life" and choose the first one, then Enable it.




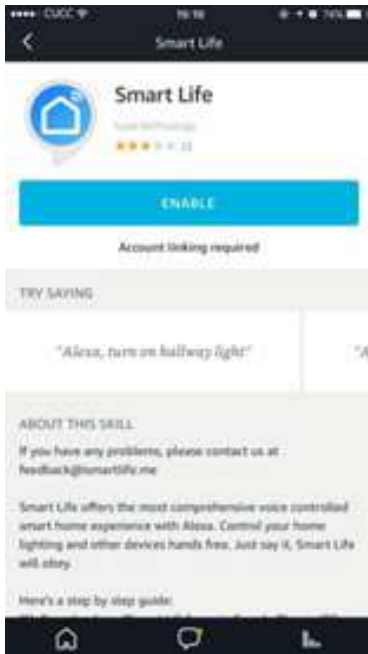


Step 3: Select your country code and Enter your “Smart life” APP Account and Password, then press the “Link Now” button. When the Account success to login press the “Done” button.

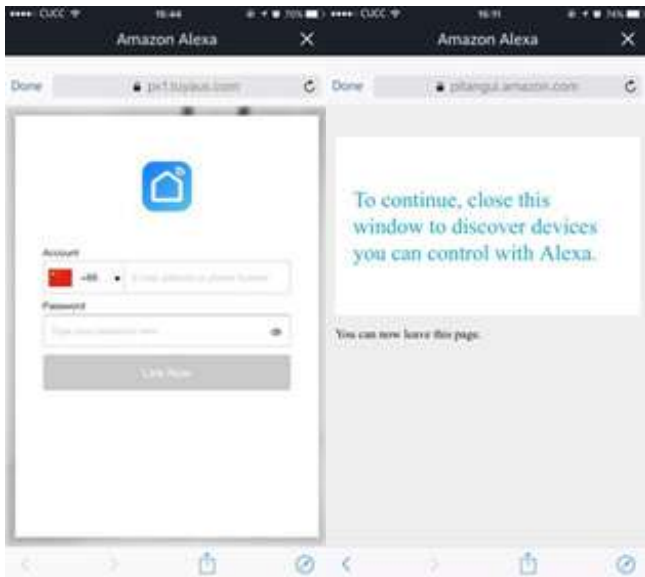

Step 4: Back to the menu, and press the “Smart home” button, then choose the “Devices”, then press the “Discover” button.

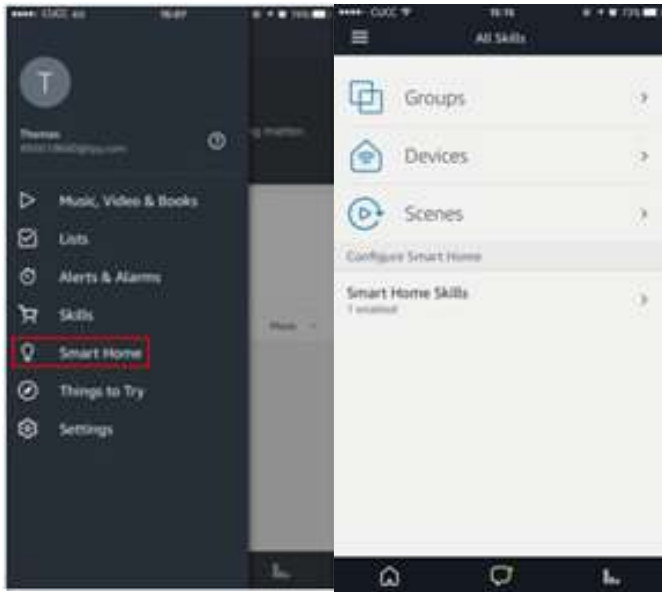


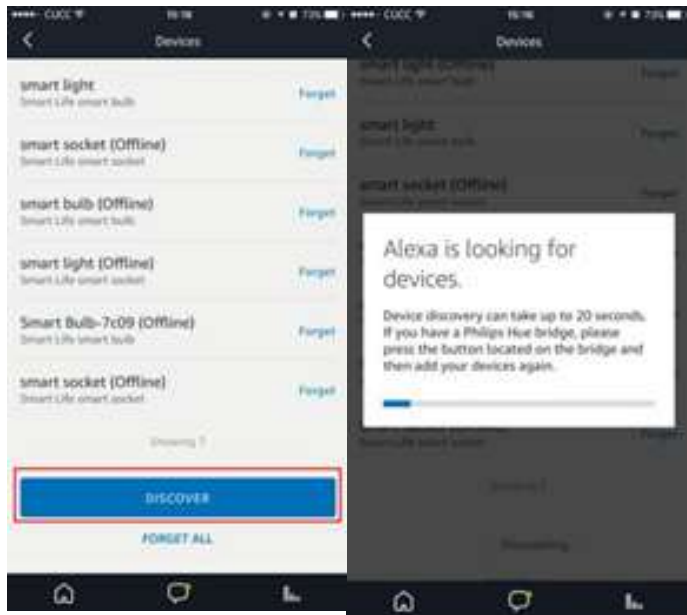


Step 5: Now u can use your Alexa to control your Smart devices, enjoy yourself.

How It Work With Google Home/IFTTT

Step 1: Click the “Integration” in Profile page of the Smart Life APP.

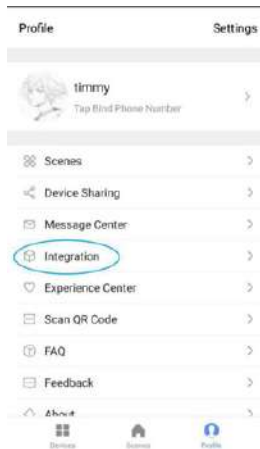


Step 2: You can see those three APP. And click “Use Now”, you will see how to use them to control you smart socket.

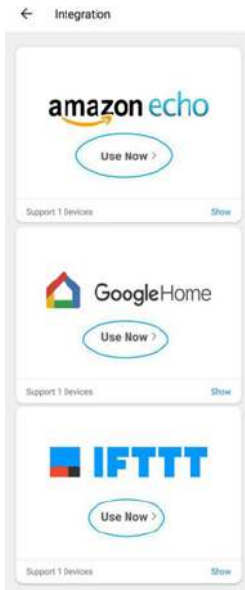

Step 3: Flow the step in those APP. Just like the Amazon Alexa/ Echo.

← Use IFTTT



How to control your device via IFTTT


Step 1: Add device
Make sure there's at least one device that support IFTTT in device list.

Step 2: Modify device name
Change device name to a easily recognized one. Such as: living room light, bedroom light.

Step 3: Download IFTTT app
Download IFTTT app from App Store or Google Play and sign in with your IFTTT account.

Step 4: Build your Applet
You can directly search "SmartLife" Service and enable the preset Applet we provide. Or you can create your own Applet, and add trigger (this) or action (that) from "SmartLife" service. Then your device will have the ability to interact with the best services from all over the world.

← Use Google Home



How to control your device via Google Home

Step 1: Add device
Make sure there's at least one device that support Google Home in device list.

Step 2: Modify device name
Change device name to a easily recognized one. Such as: living room light, bedroom light.

Step 3: Set up Google Home
Make sure phone system language is English. Then use Home App to set up Google Home.

Step 4: Add Home Control Action
Add device in Home Control of the Home app. Select "SmartLife", then fill in the correct login info of your app account to finish the account linking. Your device should be listed in Home Control device list now.

Step 5: Control device
Now you can control devices through Google Home.
The following voice commands are supported:
Ok Google, turn on the plug.
Ok Google, set bedroom light to 35%.
Ok Google, brighten bedroom light.
Ok Google, kitchen light to green.

WARRANTY POLICY

Qian S.A. de C.V., will warranty this product in all its parts and workmanship for the period of 12 months, counting from the date of purchase against defects in manufacture and operation during normal and domestic use of this product.

Qian S.A. de C.V. warranty the buyer the absence of manufacturing and operation anomalies including parts and components of the product or in relation to materials.

- 1.** This policy covers only products marketed by **Qian S.A. de C.V.**, through its authorized distributors within the Mexican Republic and United States of America.
- 2.** For the validation of this, the defective product must be presented together with this warranty policy completely filled out and stamped by the distributor that made the sale or the invoice, receipt, or proof of purchase in the place where the product was purchased, or in the National Service Center.
- 3.** **Qian S.A. de C.V.** may use new parts, refurbished or used in good condition to repair or replace any product at no additional cost to the consumer, as long as the warranty period specified in this policy has not been completed.

4. If the product does not have repair, change a similar product or superior characteristics is generated.
5. The repair time will not exceed 30 calendar days from the date of receipt of the product by **Qian S.A. de C.V.** or its Authorized Service Center.
6. **Qian S.A. de C.V.** will cover shipping costs required for presentation of the product within the network of authorized service centers.

EXCLUSIONS

Qian S.A. de C.V. will not validate this warranty policy in the following cases:

- When the product has been used under normal conditions.
- When the product had not operated according to the instructions of use that accompanies it.
- When the product has been altered or repaired by unauthorized persons by **Qian S.A. de C.V.**

For warranty purposes, as well as procurement of components, consumable parts and accessories www.qian.mx can request information or contact any Authorized Service Center **Qian S.A. de C.V.**

**Authorized Service Center Warranty:
Qian S.A. de C. V.**

Calz. José Guadalupe Gallo #8490-A
Col. Agua Blanca Industrial, Zapopan
Jalisco, México. C.P. 45235
Tel. +52.33.1078.3404

**Authorized Service Center for Components,
Consumables and Accessories:
Qian S.A. de C. V.**

Calz. José Guadalupe Gallo #8490-A
Col. Agua Blanca Industrial, Zapopan
Jalisco, México. C.P. 45235
Tel. +52.33.1078.3404

Product:	
Date of Purchase:	Distributor Seal
Model:	
Brand: Qian.mx	

Information On Security

Safety Warnings of Alternating Current (AC)



WARNING: Place the smart socket in an AC outlet. Connect the smart socket only to grounded outlets to avoid the risk of electric shock.



WARNING: Disconnect the smart socket when removing the cover.



WARNING: Do not start the smart socket without the cover.



WARNING: The user should not perform any type of repair to the smart socket. To avoid damage, entrust your repair or replacement to only a qualified person.

CONSUMPTION	Energy Input: Alternating Current 100V~125V 50Hz/60Hz 10A
	Energy Output: Alternating Current 100V~125V 50Hz/60Hz 10A



www.qian.mx